




EXTREME EXTERIOR HIGH SPEED RUBBER DOOR

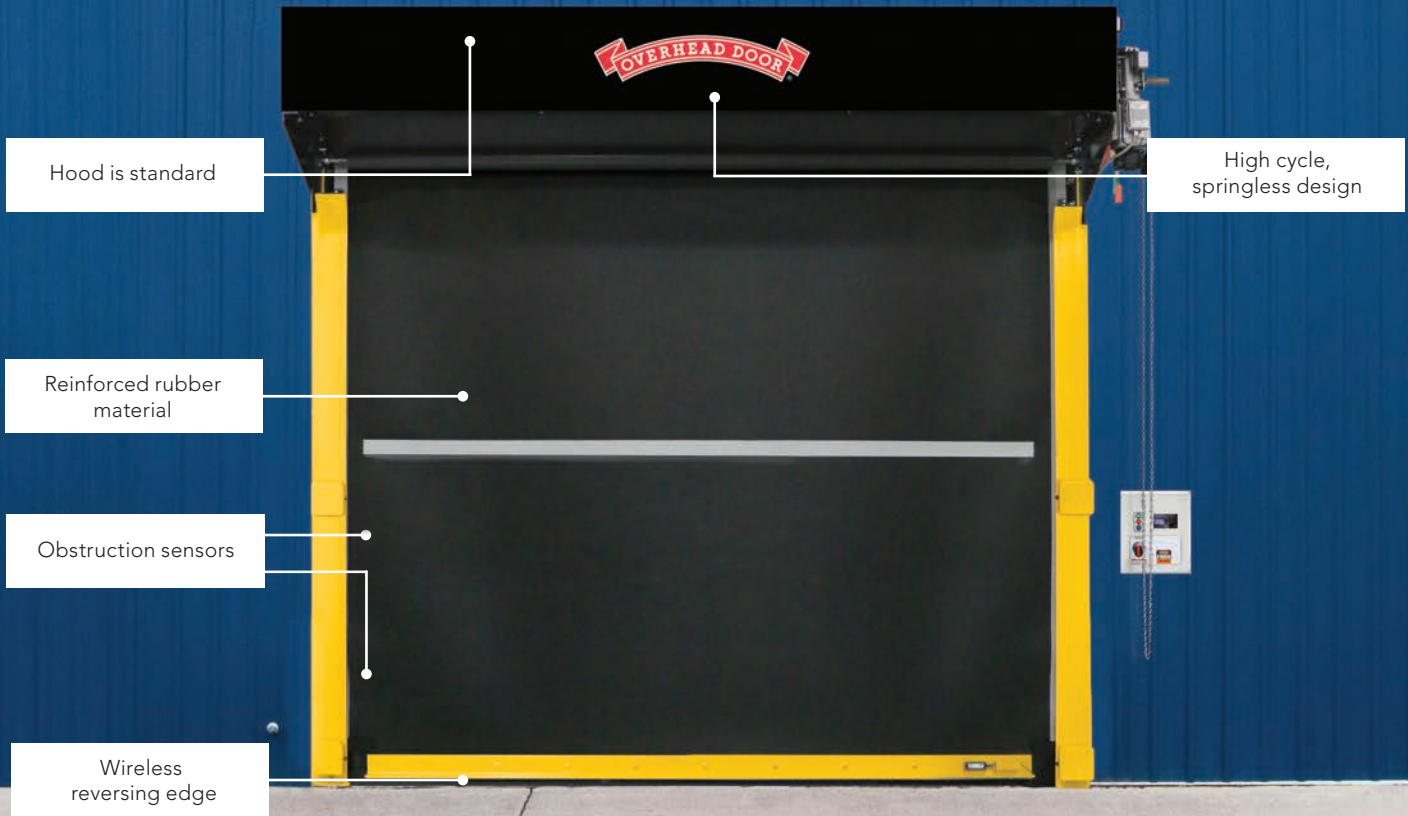

**PERFECT FOR LARGE OPENINGS, MANUFACTURING, MINING,
PARKING GARAGES, WAREHOUSE AND DISTRIBUTION FACILITIES**

- **Engineered for high cycles**
 - Springless design for minimal maintenance
 - Direct-mounted gear drive minimizes wear and tear
 - Variable frequency drive eliminates sudden jolts from door start/stop
- **Rugged construction** – Multi-reinforced rubber provides added strength without the weight
- **Perfect for exterior environments** – Nitrile butadiene rubber provides resistance to petrochemicals
- **Low maintenance** breakaway design with impact detection and push button self-repair; plug and play wiring



INDUSTRY LEADING
COMMERCIAL & INDUSTRIAL SOLUTIONS

MODEL 995 EXTREME EXTERIOR HIGH SPEED RUBBER DOOR

| Attributes | General specifications |
|---------------------------|---|
| Application | Exterior |
| Maximum width | 30' |
| Maximum height | 30' |
| Opening speed | Up to 50"/sec |
| Closing speed | Up to 40"/sec |
| Curtain lock | Yes |
| Break-away self reset | Yes |
| Pressure/wind resistance* | Up to 27.0 PSF or 180 MPH |
| Operational pressure ** | Up to 5 PSF or 75 MPH |
| Wind strut | Not available |
| Door panel | 5 layers of NBR Rubber with 4 layers of polyester weave |
| Vision option | 10" x 20" windows (maximum quantity depending on door size) |
| Operation | Direct drive motor and gearbox system with a door stop device |
| Control | Variable frequency drive NEMA 4X cULus listed Onboard self diagnostic and service reminder Built-in padlockable field disconnect |
| Obstruction detection | Infrared sensors mounted in-plane to the door curtain at 6" and 50" - 54" from floor |
| Reversing safety edge | Wireless reversing edge |
| Electrical availability | 230V AC 3PH; 460V AC 3PH; 575V AC 3PH |
| Actuation options | Push button, key switch, pull switch, loop detector, motion detector, treadle switch, radio control |
| Signaling device options | Red/green LED warning light, horn/strobe combination, rotating warning light |
| Warranty | 5-Year Limited |




Continuous curtain locks on both edges

* Pressure/wind resistance value is the ultimate pressure tested at door width of 19'. The mph is determined in accordance to ASCE 7-10 EXP B.

** Operational pressure value is the pressure tested up to 100,000 cycles at door width of 19'.

Color options



Black

Standard color for guides, brackets, struts and bottom bar is yellow. 197 optional RAL powder coat colors are available.

Actual colors may vary from brochure due to fluctuation in the printing process. Always request a color sample from your Overhead Door Distributor for accurate color matching.



INDUSTRY LEADING
COMMERCIAL & INDUSTRIAL SOLUTIONS



2501 S. State Hwy. 121 Bus., Suite 200, Lewisville, TX 75067

1-800-929-DOOR • sales@overhaddoor.com

www.overhaddoor.com